



REFUSE & RECYCLING BODY COMPANY

ROUTE KING SERIES

COCOLLECTOR[®] Front Loader

Available with IQAN computerized leveling system option for fully automatic loading!



*Two or Three
Compartments*



KANN Manufacturing Corporation


210 Regent Street
PO Box 400
Guttenberg IA 52052 0400

Tel (563) 252 2035

Fax (563) 252 3069

E-mail sales@kannmfg.com

Web www.kannmfg.com

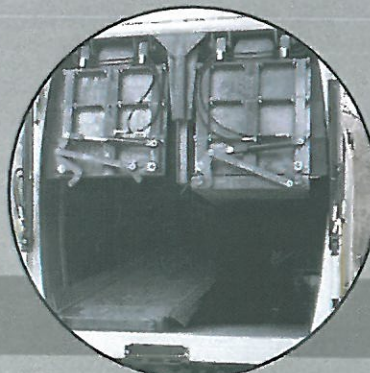

**Patented Horizontal Drop Floor With
Variable Volume Adjustable
Bulkhead Feature**

04/2006

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



REFUSE & RECYCLING BODY COMPANY

ROUTE KING SERIES

COCOLLECTOR[®] Front Loader



FEATURES

GENERAL

- 3 yd³ carry can capacity
- 4000 LB lift arm capacity
- 10 yd³ hopper capacity
- 48 GPM at 1200 RPM hydraulic pump
- 73 GAL hydraulic reservoir with 100 MESH suction strainer and 10 MICRON return line filter
- 2000 PSI operating pressure
- O-ring or JIC hydraulic fittings
- 70 GPM hydraulic valve
- 6 IN bore x 66 IN stroke, single stage, double acting bottom compactor blade cylinder, 58,000 LB compaction force
- 2 single stage, double acting top compactor blade cylinders; 33,700 LB combined compaction force
- 3 IN x 36 IN tailgate cylinders
- 52° dump angle; 135° tailgate rotation
- Hydraulic tailgate operation
- 3 yd³ bubble tailgate capacity
- 6 IN tapered body from front to back for easy discharge; sealed to hold liquids up to 24 IN deep
- Single or continuous compactor cycle penetrates receiving container 12 IN eliminating feedback and provides ejection force
- 15 AMP automatic reset circuit breakers
- Loom protected wiring
- Self leveling carry can

CHASSIS

- 20,000 LB front axle
- 44,000 LB rear axle
- 2,580,000 minimum RPM per rail IN/LB

| | Single Axle | Tandem Axle | Tandem Axle w/ Tag |
|-----------------------|-----------------------------------|------------------------------|--------------------|
| CC 23 YD ³ | 155-158 IN WB (requires tag axle) | 173-180 IN WB | NA |
| CC 31 YD ³ | NA | 197-210 IN WB | 197 IN |
| CC 35 YD ³ | NA | V2 197 IN WB V3 210 IN WB | 197 IN |

OPTIONS

FUNCTION

- 45 sec compactor cycle
- 8 sec cart tipper cycle
- 14 sec lift arm cycle

TIPPER

- Cart tippers

LEVELING

- IQAN computerized leveling system

LIGHTS

- LED lights
- Safety work lights
- Strobe light

PAINT


- Standard PPG other than white
- Metallic
- Multi-color
- Striping

SAFETY


- 10 or 20 LB fire extinguisher
- Tool box
- On-board scales
- Fork lockout
- Flat tailgate
- Camera (single, dual)
- Service jack package



Separate independent compartments to eliminate cross contamination issues between commodities.

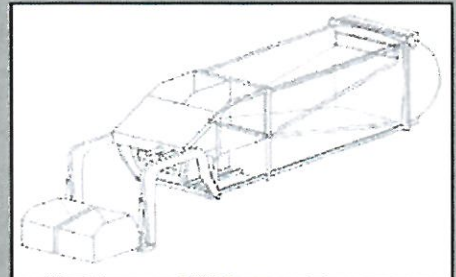

The 2 and 3 compartments split horizontally. Top compartment(s) adjust to fit your route needs.

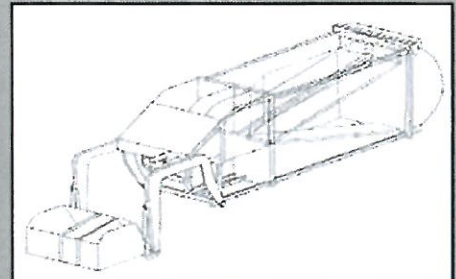

The compartment volumes can be manually adjusted to 50/50, 60/40, or 70/30.