

# KANN

**MANUFACTURING CORPORATION**

**REFUSE & RECYCLING BODY COMPANY**

Established 1946

**CURB MASTER SERIES**

**Up & Over Recycler**

# Up and Over

## Full Length Trough Recycler



**KANN Manufacturing Corporation**

210 Regent Street  
Post Office Box 400  
Guttenberg, IA 52052 USA

**For FREE Route Demonstration at Your Site Call 800-806-5266**

Phone 563-252-2035    Email [sales@kannmfg.com](mailto:sales@kannmfg.com)  
Fax 563-252-3069    Web [www.kannmfg.com](http://www.kannmfg.com)

**Kann Up & Over YouTube Video Links:**  
[www.youtube.com/watch?v=2eFrXwhaqFQ](http://www.youtube.com/watch?v=2eFrXwhaqFQ)  
[www.youtube.com/watch?v=pJbo9--s3kU](http://www.youtube.com/watch?v=pJbo9--s3kU)



# KANN

## MANUFACTURING CORPORATION REFUSE & RECYCLING BODY COMPANY


Established 1946

### CURB MASTER SERIES

### Up & Over Recycler



The low trough loading height and simple controls allow the operator easy loading cycle operation.

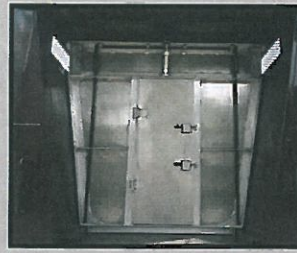

Structural lightweight aluminum bulkheads maximize payloads.



### STANDARD FEATURES

#### PERFORMANCE

- 12 Second Trough Cycle

#### BODY SPECIFICATIONS

- Body Sizes:  
20, 25, 30, 35, 40 & 45 yd<sup>3</sup>
- Single or Dual Side Loading
- 1 yd<sup>3</sup> or 5 yd<sup>3</sup> Tailgate
- 1.0 or 1.5 yd<sup>3</sup> Trough Capacity
- 180 to 276 Inch Body Lengths
- 93 & 104 Inch Body Height
- 102 Inch Body Width

#### STANDARD FEATURES

- Single Side Loading
- Adjustable Aluminum Bulkheads
- PTO or Front Mount Pump Driven.
- Over-speed Protection
- Standard Wiring Package, Auto Reset Circuit Breakers are All Wiring Loom Protected
- LED Light Package Complies with DOT/FMVSS Standards
- 20 lb. Fire Extinguisher
- Dual Tailgate Safety Props

#### STANDARD FEATURES Continued

- Pneumatic Controls
- Dual Tailgate Safety Props
- Tailgate Ajar/Over Height Alarm
- Sight Temperature Gauge
- Hydraulic Tailgate Locks
- Hydraulic Suction Line Shut-off Valve
- 100 Mesh Suction Strainer
- 10 Micron In-line Return Filter
- 30 Gallon Reservoir Tank
- Low trough loading height
- Variable number and compartment sizes
- White PPG Paint over Primer


#### CHASSIS SPECIFICATIONS

- Cab to Axle 108 Inch or 186 Inch
- GVWR Starting at 26,000
- Frame Rail Bending Moment 1,100,000 in-lbs

#### OPTIONS

- Densifier Compactor
- Cart Latch Attachment(s)
- Camera – Single or Dual
- Safety Work Light Package
- Spill Kit Package
- 4 yd<sup>3</sup> Tailgate

The Kann Side Dump Compacting Container option gives the Kann Up and Over the capability to pack 18 yd<sup>3</sup> of uncompacted plastic into a 1 yd<sup>3</sup> container that can be easily unloaded onto the ground or into a roll off container.

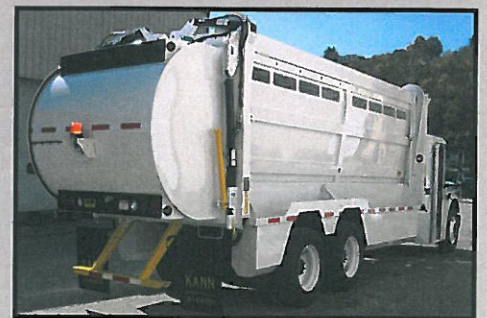

The Kann Up and Over Recycler equipped with a 5 yd<sup>3</sup> bubble tailgate option for added capacity.



The Kann densifier wall (shown with access door open) is engineered to compact commodities to achieve maximum payloads

### KANN Manufacturing Corporation

210 Regent Street  
Post Office Box 400  
Guttenberg, IA 52052 USA

For FREE Route Demonstration at Your Site Call 800-806-5266

Phone 563-252-2035 Email [sales@kannmfg.com](mailto:sales@kannmfg.com)  
Fax 563-252-3069 Web [www.kannmfg.com](http://www.kannmfg.com)