



REFUSE & RECYCLING BODY COMPANY

## CURB MASTER SERIES

# Two Compartment Side Loader



*Patented Horizontal Drop Floor  
With Variable Volume Adjustable  
Bulkhead Feature and Full Eject Blades  
For Each Compartment*



*Load With Blade In Any  
Position and Pack-on-the-Go*



### **KANN Manufacturing Corporation**

210 Regent Street  
PO Box 400  
Guttenberg IA 52052 0400

**Tel** (563) 252 2035

**Fax** (563) 252 3069

**E-mail** [sales@kannmfg.com](mailto:sales@kannmfg.com)

**Web** [www.kannmfg.com](http://www.kannmfg.com)



*Low Loading Height, Split Trough,  
and Up To 2 Cart Tipper*

04/2006

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



REFUSE & RECYCLING BODY COMPANY

## CURB MASTER SERIES

# Two Compartment Side Loader



### FEATURES

#### FUNCTION

- 12-15 SEC trough cycle
- 30 SEC compactor cycle
- 95 SEC full eject cycle
- Pack-on-the-go

#### GENERAL

- 18, 21, 23, 27, 30, 32 YD<sup>3</sup> body capacities
- 1.1 YD<sup>3</sup> top hopper capacity
- 3.8 YD<sup>3</sup> bottom hopper capacity
- 102 IN body height above chassis frame with trough down
- 157 IN body height above chassis frame with trough up
- 96 IN body width
- 3 FT x 4 FT (12 FT<sup>2</sup>) top hopper opening
- 3.5 FT x 4 FT (14 FT<sup>2</sup>) bottom hopper opening
- 1.8 YD<sup>3</sup> split trough capacity; 0.9 YD<sup>3</sup> per split
- 1200 LB maximum trough lift capacity
- Trough loading height approximately 35 IN from ground to trough edge
- Up to 800 LB/YD<sup>3</sup> payload
- 100 MESH suction strainer
- 10 MICRON in-line return filter
- 60 GAL reservoir with internal baffles
- Sight/temperature gauge
- 2 single stage, double acting compactor blade cylinders (per compactor)
- 1 telescopic, double acting eject cylinder (per compartment)
- 2 single stage, double acting tailgate cylinders
- 2 single stage, double acting trough lift cylinders
- Standard light package to comply with DOT and FMVSA standards
- Tailgate safety props
- Standard wiring package automatic reset circuit breakers and all wiring loom protected
- Tailgate ajar/overheight, arms overheight, and hydraulic overheat alarms
- White PPG paint
- Body access door
- Front mount pump
- 4 sealed body clean-outs
- Body access ladder
- Hydraulic tailgate locks with manual overlock
- Hydraulic suction line shut-off valve

### OPTIONS

#### CHASSIS

- 54,000-66,000 GVW
- 14,000-20,000 front GVWR
- 40,000-46,000 rear GVWR

#### SAFETY

- 10 LB or 20 LB fire extinguisher
- Camera (single, dual)

#### AXLE

- Tag
- Pusher
- Steerable tag
- Steerable pusher

#### TIPPER

- Cart tipper

#### TROUGH

- Foldable trough face option

#### HYDRAULICS

- 3 or 6 MICRON return line filter with bypass flush
- Transmission mount PTO

#### LIGHTS


- LED lights
- Safety work light package
- Strobe light

#### PAINT


- Standard PPG other than white
- Metallic
- Multi-color
- Striping



*The large 1.8 yd<sup>3</sup> split loading trough capacity and the capability to have up to 2 cart latches mounted on the trough provides complete versatility of bag, bulk, and cart routes.*

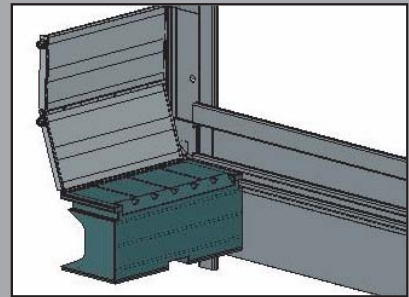

*A) The hinged follower cover allows for constant loading without commodity falling behind the compactor blade.*

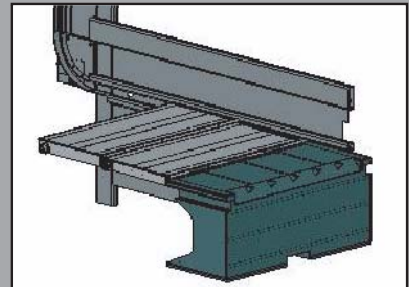

*B) The follower cover extends and retracts with the blade.*



*Easily removable bulkhead panels allow for compartment volume to be adjusted 50/50, 60/40, or 70/30. Each compartment has a full eject push out panel that quickly ejects all types of refuse and recyclables easily and completely clean.*