

**KF
SERIES**
Multi-Purpose
Collection
Vehicle

KF-2C

**FRONT LOADING COLLECTION
TWO COMPARTMENTS
INDIVIDUAL COMPACTORS**



2 Stream Commercial Collection Using Standard Containers

- Collect and Compact Garbage, Recyclables, Yard Waste, or any Two
- Picks Up Standard Front Load Style Containers
- Arms Available Rated at 8,000 and 10,000#
- Curved Body Design for Strength with Minimum Weight
- Tapered Body for Complete Discharge
- Computer Controlled Arms and Forks

KANN

KF SERIES SPECIFICATIONS

BODY CAPACITY	28 CU. YDS.	33 CU. YDS.	38 CU. YDS.
HOPPER CAPACITY	10 CU. YDS.	10 CU. YDS.	10 CU. YDS.
TOTAL CAPACITY	38 CU. YDS.	43 CU. YDS.	48 CU. YDS.
USABLE CT	154"	184"	214"

STANDARD FEATURES

BODY CONSTRUCTION

- 12 Ga. - 50,000 PSI Sides
- 14 Ga. - 50,000 PSI Top
- 3/16" AR - 100,000 PSI Floor
- 10 Ga. - 50,000 PSI Hopper Sides
- 3/16" AR - 100,000 PSI Hopper Floor
- Curved Wall Construction for Strength with Less Weight
- Tapered Body for Ease of Unloading
- 52° Dump Angle
- 2 Compartments with Adjustable Internal Bulkhead and Drop Floor

TAILGATE CONSTRUCTION

- 14 Ga. - 50,000 PSI Steel
- 3 Yard Capacity Bubble Style
- Raised, Lowered, and Latched Hydraulically

LIFT ARM AND FORK ASSEMBLY

- 4,000# Lift Arm Capacity (Residential)
- 8,000# Lift Arm Capacity (Commercial)
- 50,000 PSI Side Plates
- 100,000 PSI Top and Bottom Bars
- Full Weld Steel Box Construction
- 5" Alum./Bronze Split Bearings
- 5" OD - 85,000 PSI Torque Tube
- Automatic Arm and Fork Control - Digitrak
- 3 Yard Carry-Can - Residential

HYDRAULIC SYSTEM

- 40 GPM @ 1200 RPM Pump
- 2,500 PSI Maximum System Pressure
- 60 Gal. Hydraulic Reservoir
- 10 Micron In-Line Filter
- 100 Mesh Suction Line Filter
- Continuous Compaction

HYDRAULIC CYLINDERS

- 6" x 72" Lower Compactor
- (2) 3.5" x 72" Upper Compactor
- (2) 6 3/4" x 5 3/4" x 4 3/4" x 84" Body Lift
- (2) 5" x 41" Arm Lift (Commercial)
- (2) 4" x 29" Fork Lift (Commercial)
- (2) 3" x 46" Tailgate

ELECTRICAL SYSTEM

- Automatic Reset Circuit Breakers
- All Wiring Is Protected
- All Lighting Meets DOT Standards


SUGGESTED CHASSIS SPECIFICATIONS

- 64,000# GVW
- 20,000# Front Axle
- 44,000# Rear Axle
- 166"-247" Wheelbase


OPTIONS

- Front Mount Pump Packages
- Cart Tippers
- Waste Oil Reservoir
- Tool Box
- Residential Hopper
- Commercial Hopper

- 10,000# Arms
- Warning Beacon
- Work Lights
- Rear View Camera/Monitor

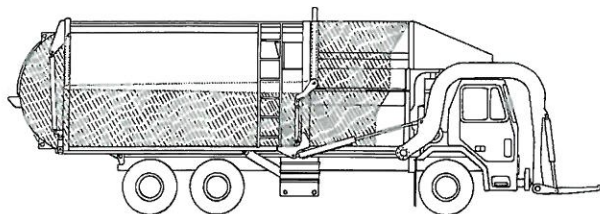

LOWER COMPARTMENT

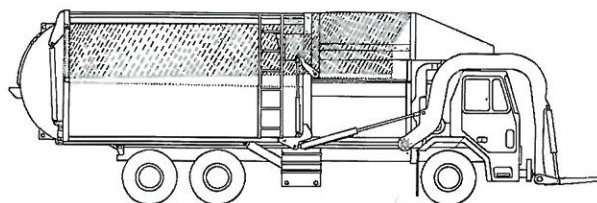

UPPER COMPARTMENT



KANN MANUFACTURING CORP.

P.O. Box 400 210 Regent Street
 Guttenberg, Iowa 52052
 Phone: (319) 252-2035 Fax: (319) 252-3069
 www.kannmfg.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE